

# ZA14J

## ARTICULATED BOOM LIFT

Comply with CE/ANSI/GB Standard

### Highlights

- Outstanding platform capacity up to 300 Kg
- Built-in multiple pressure control leveling system to enhance stability
- Precise load sensing system to prevent overload operations
- Integrated rotary reducer for improved stability
- Dust protection kit for tough working environment
- Deadweight Lowering System for smooth operation



### Features

#### Standard

- Horn
- All motion alarm
- Proportional control
- Self-closing entry gate
- Flashing amber beacon
- Auto-leveling system
- Emergency stop button
- Over tilt protection system
- Emergency descent system
- On-board diagnostic system
- Oscillating axle
- 4.3' LED display
- Load sensing system
- Swing-out engine tray
- Secondary Guarding System








# ZA14J

## ARTICULATED BOOM LIFT

Comply with CE/ANSI/GB Standard

### Technical data

<b>Model</b>	ZA14J
<b>Size</b>	
Work Height	15.8 m
Platform Height	13.8 m
Horizontal Outreach	8.3 m
Up and Over Height	7.55 m
A - Stowed Length	6.57 m
B - Stowed Width	2.3 m
C - Stowed Height	2.27 m
D - Platform Length	1.83 m
E - Platform Width	0.76 m
F - Wheelbase	1.24 m
G - Ground Clearance	2.36 m
<b>Performance</b>	
Platform Capacity	300 kg
Drive Speed	6.8 km/h
Gradeability	45% (24°)
Axles Oscillation	0.1 m
Turning Radius (Inside)	2.06 m
Turning Radius (Outside)	4.78 m
Swing	355° non-continuous
Platform Rotation	±90°
H - Tail Swing	0
Max. Wind Speed	12.5 m/s
<b>Power</b>	
<b>Diesel Engine</b>	Kubota V2403 36kW / 2600rpm
Fuel Tank Capacity	65 l
Auxiliary Power	12 V
Control Voltage	12 V
Hydraulic System Capacity	150 l
Hydraulic Tank Capacity	76 l
Drive	4WD
<b>Tires</b>	
Type	315/55 D20 Foam-filled tires 33x12-20 Solid Tires
<b>Weight</b>	
Gross	7100 kg

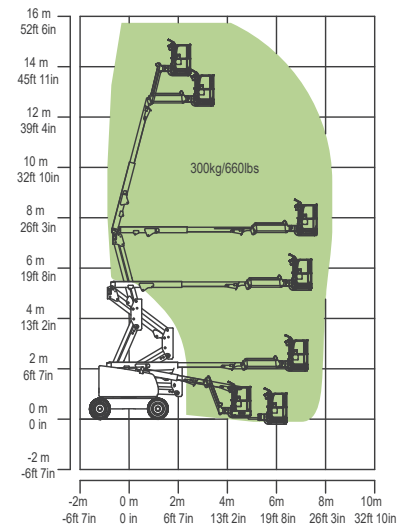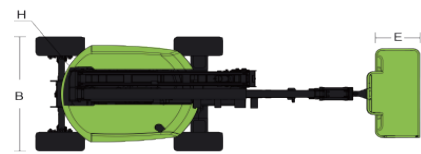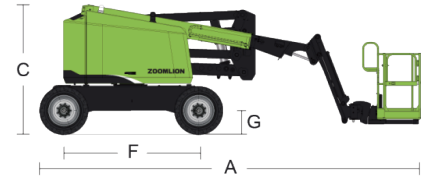

ZOOMLION ITALIA S.r.l.  
Via Stati Uniti d'America, 26 - 20030 Senago (MI) - Italy  
Phone +39-02-990131 - info@zoomlion-italia.it - www.zoomlion-italia.it



zoomlion-italia.it



ZA14J\_EN\_0624