

ZA24J

ARTICULATED BOOM LIFT

Comply with CE/ANSI/GB Standard

Highlights

- Platform capacity up to 250 Kg
- Built-in multiple pressure control leveling system to enhance stability
- Precise load sensing system to prevent overload operations
- Fast lifting function: boom lowering without boom folding operations
- Great negative reach up to 5.1 m
- Maximum working height up to 26.5 m

Features

Standard

- Horn
- All motion alarm
- Proportional control
- Self-closing entry gate
- Flashing amber beacon
- Auto-leveling system
- Emergency stop button
- Over tilt protection system
- Emergency descent system
- On-board diagnostic system
- Oscillating axle
- 4.3' LED display
- Load sensing system
- Swing-out engine tray
- Secondary Guarding System








ZA24J

ARTICULATED BOOM LIFT

Comply with CE/ANSI/GB Standard

Technical data

Model	ZA24J
Size	
Work Height	26.5 m
Platform Height	24.5 m
Horizontal Outreach	18.9 m
Up and Over Height	9.42 m
A - Stowed Length	11.25 m
B - Stowed Width	2.49 m
C - Stowed Height	3 m
D - Basket Length	2.44 m
D - Basket Length	0.91 m
Jib Length	1.83 m
F - Wheelbase	3.05 m
G - Ground Clearance	0.4 m
Performance	
Platform Capacity	250 kg
Drive Speed	5 km/h
Gradeability	45% (24°)
Axles Oscillation	0.2 m
Turning Radius (Inside)	3.35 m
Turning Radius (Outside)	6.48 m
Swing	360° continuous
Platform Rotation	±90°
H - Tail Swing	0.94 m
Max. Wind Speed	12.5 m/s
Power	
Diesel Engine	Cummins QSF2.8 54kW/2400rpm
Fuel Tank Capacity	150 l
Auxiliary Power	12 V
Control Voltage	12 V
Hydraulic System Capacity	240 l
Hydraulic Tank Capacity	180 l
Drive	4WD
Tire	
Type	15-625 Foam-filled tires
Weight	
Gross	18300 kg

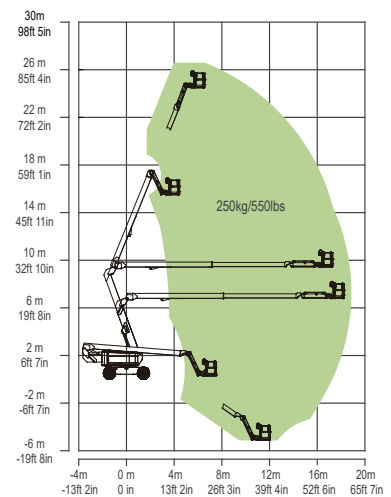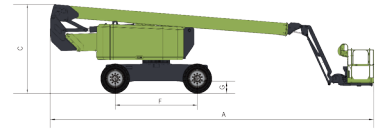

ZOOMLION ITALIA S.r.l.
 Via Stati Uniti d'America, 26 - 20030 Senago (MI) - Italy
 Phone +39-02-990131 - info@zoomlion-italia.it - www.zoomlion-italia.it



zoomlion-italia.it



ZA24J_EN_0624